

Verification Report



Software Version:	9.0.0	Serial Number:	1559F
Scan Time:	05/03/2026 10:37:04 (+0000)	Factory Configuration:	23/07/2025
Decode Time:	05/03/2026 10:37:09 (+0000)	User Calibration:	04/03/2026
Computer Name:	CPOLLOCK	User Name:	cp

Decoded Message	Symbology	Print Quality	Application Validation
7332551925352	EAN-13	3.5/06/660 (A) - Pass (≥1.5)	Pass
7332551925352	EAN-13	3.4/06/660 (B) - Pass (≥1.5)	Pass
FNC10107332551925352171701001012051234	GS1 DataMatrix	3.5/08/660 (A) - Pass (≥1.5)	Fail
FNC10107332551925352171701001012051234	GS1 DataMatrix	3.4/08/660 (B) - Pass (≥1.5)	Fail

Axicon Camera Verifier 9.0.44-g4aca1fbd:9.x-fixes
 Axicon Auto ID Limited www.axicon.com

Verification Report

7332551925352

EAN-13

Print Quality: **3.5/06/660 (A) - Pass**
(≥ 1.5)

Application Validation: **Pass**



X Dimension	367.0 μm , 111% (80%..200%)
Print Gain	31 μm , 8.4% ($\pm 32.0\%$)
Check Character	Pass: '2'
Left Quiet Zone	10 Pass
Right Quiet Zone	10 Pass
Height	12.8 mm
Width	41.5 mm

GS1 Healthcare Retail (Pass):	7332551925352
GS1 Retail (Pass):	7332551925352

ISO Parameter	Grade	Percentage
Overall	3.5 (A)	
Minimum Reflectance	4.0 (A)	2.4%
Maximum Reflectance		83.8%
Threshold		38.5%
Reflectance Margin		26.6%
Symbol Contrast	4.0 (A)	81.3%
Minimum Edge Contrast	4.0 (A)	54.0%
Modulation	3.5 (A)	66.4%
Defects	4.0 (A)	3.5%
Decodability	3.9 (A)	67.3%
Decode	4.0 (A)	

Print Quality Standard: ISO/IEC 15416
Symbology Specification: ISO/IEC 15420
Verifier Conformance Standard: ISO/IEC 15426-1

Axicon Camera Verifier 9.0.44-g4aca1fbd:9.x-fixes
Axicon Auto ID Limited www.axicon.com


Verification Report

7332551925352

EAN-13

Print Quality: **3.4/06/660 (B) - Pass**
(≥ 1.5)

Application Validation: **Pass**

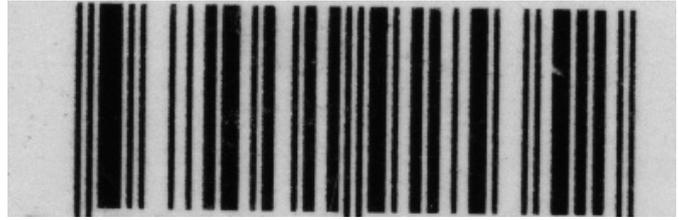

X Dimension	367.7 μm , 111% (80%..200%)
Print Gain	33 μm , 8.9% ($\pm 32.0\%$)
Check Character	Pass: '2'
Left Quiet Zone	10 Pass
Right Quiet Zone	10 Pass
Height	12.8 mm
Width	41.6 mm

GS1 Healthcare Retail (Pass):	7332551925352
GS1 Retail (Pass):	7332551925352

ISO Parameter	Grade	Percentage
Overall	3.4 (B)	
Minimum Reflectance	4.0 (A)	2.6%
Maximum Reflectance		83.5%
Threshold		38.4%
Reflectance Margin		26.7%
Symbol Contrast	4.0 (A)	81.0%
Minimum Edge Contrast	4.0 (A)	54.5%
Modulation	3.6 (A)	67.3%
Defects	4.0 (A)	4.3%
Decodability	3.6 (A)	61.5%
Decode	4.0 (A)	

Print Quality Standard: ISO/IEC 15416
Symbology Specification: ISO/IEC 15420
Verifier Conformance Standard: ISO/IEC 15426-1

Axicon Camera Verifier 9.0.44-g4aca1fbd:9.x-fixes
Axicon Auto ID Limited www.axicon.com


Verification Report

FNC10107332551925352171701001012051234

GS1 DataMatrix

Print Quality: **3.5/08/660 (A) - Pass (≥1.5)**

Application Validation: **Fail**



Matrix Size	18x18
Minimum Reflectance	2.9%
Maximum Reflectance	82.0%
X Dimension	486 µm
Y Dimension	497 µm
X Print Gain	-24 µm, -4.9%
Y Print Gain	-58 µm, -11.6%

GS1 Healthcare Retail (Fail): (01)07332551925352(17)170100(10)12051234

ISO Parameter	Grade	Percentage
Overall	3.5 (A)	
Decode	4.0 (A)	
Symbol Contrast	4.0 (A)	79.1%
Axial Non-Uniformity	4.0 (A)	2.1%
Grid Non-Uniformity	4.0 (A)	7.0%
Modulation	4.0 (A)	
Unused Error Correction	4.0 (A)	100.0%
Contrast Uniformity		35.8%
Fixed Pattern Damage	3.5 (A)	
Print growth	3.9 (A)	11.6%

Print Quality Standard: ISO/IEC 15415
Symbology Specification: ISO/IEC 16022
Verifier Conformance Standard: ISO/IEC 15426-2

Axicon Camera Verifier 9.0.44-g4aca1fbd:9.x-fixes
Axicon Auto ID Limited www.axicon.com


Verification Report

FNC10107332551925352171701001012051234

GS1 DataMatrix

Print Quality: **3.4/08/660 (B) - Pass (≥1.5)**

Application Validation: **Fail**



Matrix Size	18x18
Minimum Reflectance	2.7%
Maximum Reflectance	81.8%
X Dimension	493 µm
Y Dimension	496 µm
X Print Gain	-20 µm, -4.1%
Y Print Gain	-88 µm, -17.7%

GS1 Healthcare Retail (Fail): (01)07332551925352(17)170100(10)12051234

ISO Parameter	Grade	Percentage
Overall	3.4 (B)	
Decode	4.0 (A)	
Symbol Contrast	4.0 (A)	79.1%
Axial Non-Uniformity	4.0 (A)	0.6%
Grid Non-Uniformity	4.0 (A)	8.1%
Modulation	4.0 (A)	
Unused Error Correction	4.0 (A)	100.0%
Contrast Uniformity		42.0%
Fixed Pattern Damage	3.4 (B)	
Print growth	3.5 (A)	17.7%

Print Quality Standard: ISO/IEC 15415
Symbology Specification: ISO/IEC 16022
Verifier Conformance Standard: ISO/IEC 15426-2

Axicon Camera Verifier 9.0.44-g4aca1fbd:9.x-fixes
Axicon Auto ID Limited www.axicon.com